


"A"	"N"	"B"	"C"
1595	3	290	1940
2145	4	330	2530
2695	5	370	3120
3240	6	415	3710
3790	7	455	4300
4340	8	495	4890
4890	9	535	5480
5440	10	580	6075
5990	11	620	6665
6640	12	660	7255

- 1) FLOOR TO BE LEVEL, FACE OF LINTEL & SIDE WALLS TO BE PLUMB & SQUARE
- 2) NO PIPES, CONDUITS OR FITTINGS SHOULD BE SITED TO OBSTRUCT THE DOOR ASSEMBLY.
- 3) VERTICAL DEFLECTION & TWISTING OF THE LINTEL DUE TO DOOR WEIGHT MUST BE CONSIDERED IN THE DESIGN OF THE DOOR HEAD, WITH DOOR BOTH OPEN AND CLOSED. (DESIGN WEIGHT OF DOOR = 40kg/m<sup>2</sup>)

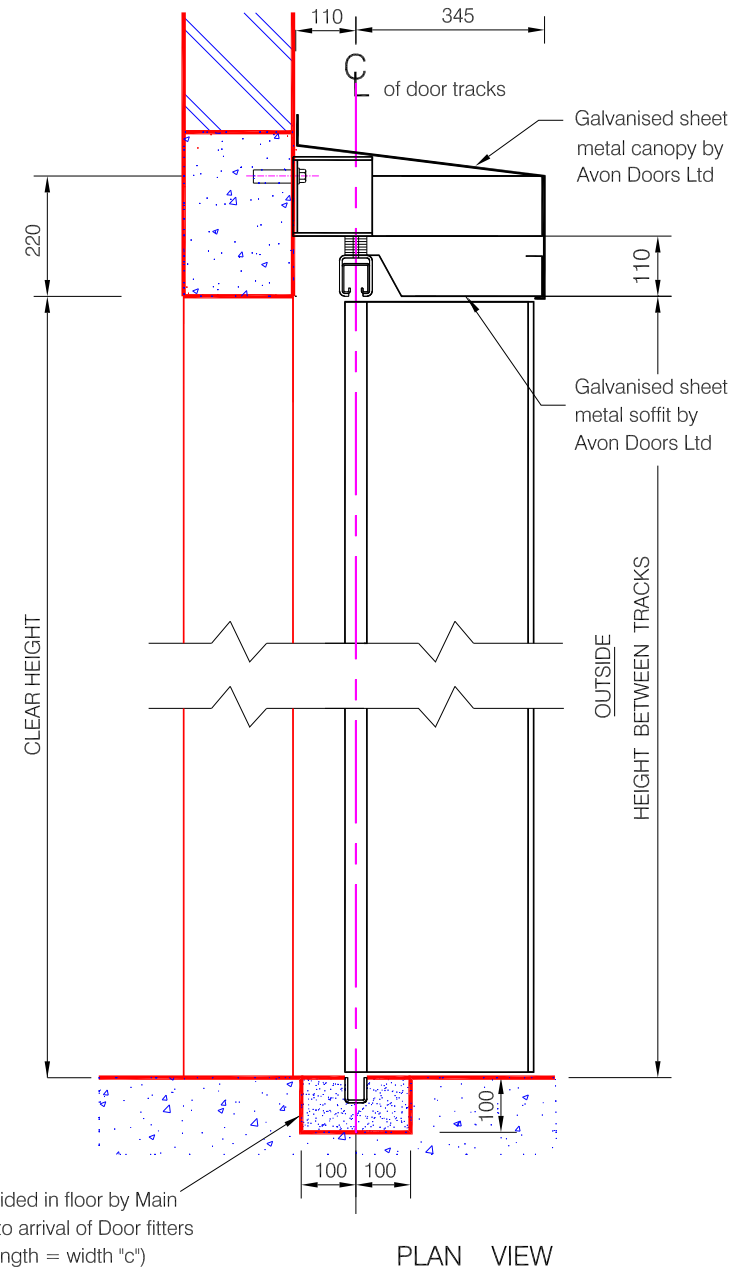

Trough to be provided in floor by Main Contractor, prior to arrival of Door fitters on site (Trough length = width "c")  
 Following installation the Main Contractor to grout - in the channel bottom track

THIS DRAWING MUST NOT BE SCALED.